

NEW PRODUCT LAUNCH - AP-LR RED® GREASE

PENSOL AP-LR RED is a high performance lithium complex grease designed for lubrication of bearings of most automotive and industrial equipment. This grease is based on high quality mineral base fluid and superior lithium complex soap thickener fortified with excellent anti-oxidant, anti-rust and anti-wear additive systems. This grease provides long term protection to the rolling elements over a wide temperature range.

PRODUCT ADVANTAGES:

- Provides long service life due to the presence of high quality mineral oil and a stable lithium complex thickener system
- Excellent oxidation stability during service
- Possesses excellent mechanical stability and high temperature lubrication capability
- Higher drain interval of minimum 60,000 km
- Provides superior protection to the rolling elements against rust and wear

SPECIFICATION:

NLGI 3

AVAILABLE PACK SIZE:

500 GM / 1 KG / 2KG / 3 KG / 5 KG / 7 KG / 10 KG / 18 KG / 50 KG / 180 KG



**INDIA'S BEST
GREASE BRAND**




TRUSTED NAME SINCE **1972**



www.pensol.com

UM R5/UM RF5

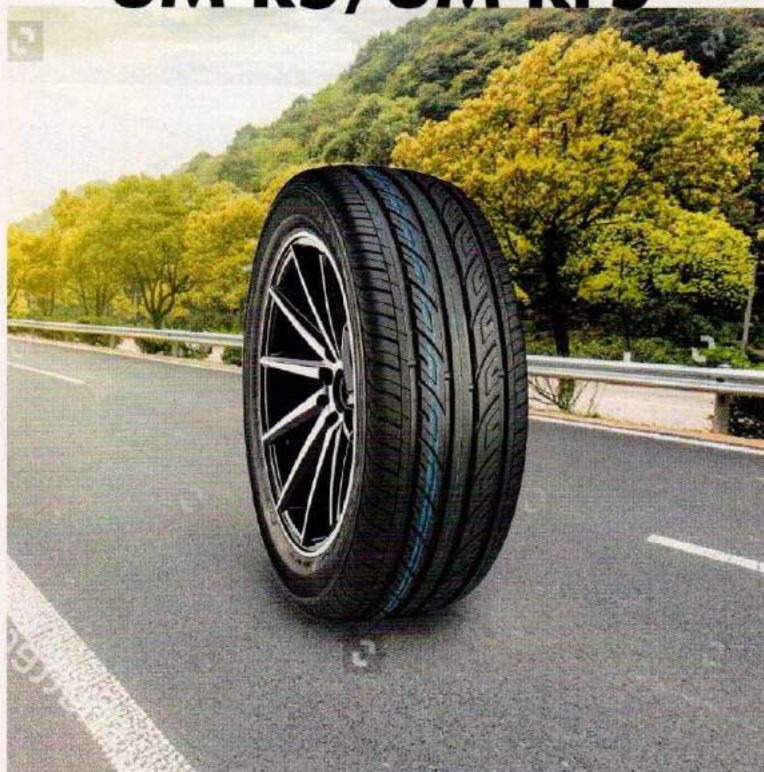

ULTRAMILE introduces Runflat tyres for luxury cars like BMW, where in Runflat tyres are the original fitted tyres in the car, Very few companies in the world have the technology to manufacture RUNFLAT tyres which are puncture proof tyres and have a special lining to hold air inside the tyre for almost 40 kms, even if pierced by a nail or a sharp object. Launching Runflat tyres symbolises and establishes the fact, that Ultramile is a high quality brand, better than most of the local and imported brands available.



— ULTRAMILE —

THE FUTURE OF MOTION

FEATURES & BENEFITS

AGGRESSIVE UNI-DIRECTIONAL TREAD DESIGN

For excellent water evacuation and reduces aquaplaning at high speed.

VARIABLE PITCH

Combination on the shoulder blocks and siping on the tread surface for quiet riding.

PREVENT IRREGULAR WEAR

Newly developed directional tread design solved irregular wear.

SILICA TREAD COMPOUND

For lower rolling resistance and excellent road holding



RIM DIAMETER
15 - 17

ASPECT RATIO
55s - 45s

SPEED RATING
W/V

M + S

